MACHINE	GALAXY-E TP (TRANSPALLET)

PALLET WRAPPING MACHINE WITH STRETCH FILM

WITH OPENING ON THE PLATE TO LOAD WITH TRANSPALLETT

SPECIFICATIONS

alphanumeric display

machine controlled by PLC

siemens frequency converters on all the motors

machine power 1,75 kw

machine supply 220-240 VAC 1 ph, 50-60 Hz

turntable diameter 1650 mm (max pallet 1200x100 mm)

max pallet weight 2000kg

Beeper on cycle start

table phase stop

photocell on the loading area to inhibit start in the event of obstacles

pallet height sensing with photocell

pallet height also settable by the panel

n° 12 custom programs

upward and downward speed adjust

speed rotation adjust

bottom rounds adjust

top rounds adjust

photocell delay adjust

only up cycle

only down cycle

up and down cycle

up and down cycle alternate

cycle with reinforcement at pre-set height

cycle with start at pre-set height

top sheet cycle

possibility to set a protection password on parameters

machine diagnostic by display

possibility to change the load position: front, side right or side left (front position is the standard if not otherwise specified)

available wrapping heights:

2000 = H 2000 mm (with film coil h500 mm)

2400 = H 2400 mm (with film coil h500 mm)

available film coil carriages:

FM : mechanical friction and manual film tension adjust

FE : electromagnetic brake and film tension adjust by control panel
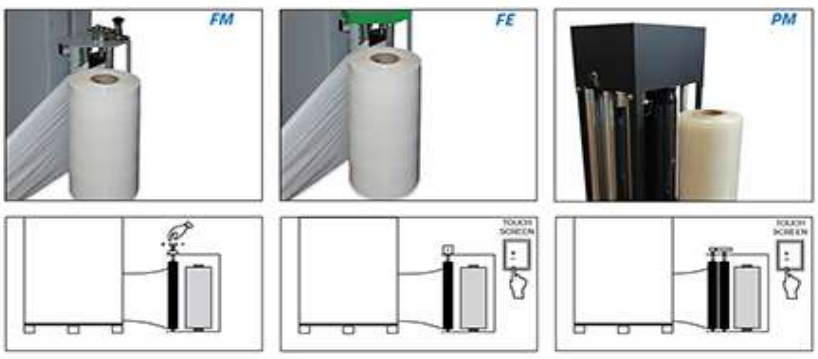
PM : power pre-stretch fix 230% (other on demand) and film tension by control panel